

GENERAL INFORMATION

ETC's DMX/RDM Four-Port Gateway provides data distribution using the quality and reliability of ETC's network technology. Built for Net3 using industry-standard streaming ACN and sACN, the Four-Port Gateway unlocks the power of your networked system. The Four-Port Gateway also uses bidirectional Ethernet communication with other network devices to send or receive DMX512 and Remote Device Management (RDM) signals.

APPLICATIONS

- Rental houses
- Touring
- University/professional theatres
- Convention centres
- Tech tables
- Stage manager panels
- System integration

FEATURES

- Distributes DMX and RDM data to any input/output device over Ethernet
- Supports Net3 protocol powered by ACN
- DMX/RDM Output/Input
- Simple configuration and service of ports
- LCD screen for labeling, status and configuration information
- Power and Network status indicators
- Power over Ethernet (PoE) or external DC power supply
- Configurable using Net3 Concert Software

ORDERING INFORMATION

Net3 Four-Port Modular Gateway and Modules

PART NO.	DESCRIPTION
4260A1113	Four-Port DMX/RDM Gateway with blank plates (PSU and Modules NOT included - choose from the list below)
4260A1010	DMX/RDM Input Module (XLR5Mm)
4260A1009	DMX/RDM Output Module (XLR5F)
4260A1011	DMX/RDM Terminal Strip Module (Screw terminal plug included). Input or Output configurable.
N34G-2F	DMX/RDM RJ45 Connector Module. Input or Output configurable.

Net3 Four-Port Gateway accessories

PART NO.	DESCRIPTION
4260A1002	Net3 Gateway Front-Panel Kit - DMX 4 Out ¹
4260A1006	Net3 Gateway Front-Panel Kit - DMX 4 In ¹
4260A1003	Net3 Gateway Front-Panel Kit - DMX 2 In 2 Out ¹
PS406-F	Net3 Gateway Universal Power Supply ² 12V 1.3A
4260K1001	Net3 Gateway Rack-Mount Kit (Holds up to two Gateways or one Gateway with Front Panel Connector Kit)
4260K1005	Net3 Gateway Hanging-Bracket Kit with U-Bolt

²N3GA-PS includes plugs for United States/Japan, Europe, Great Britain, and Australia/China. Used with Net3 Four-Port, Response 4 Port, Two-Port, Show Control and I/O Gateways.



SPECIFICATIONS

FUNCTIONAL

- Supports Net3/ACN (ANSI E1.31 and E1.17)
- Supports RDM (ANSI E1.20)
- Supports USITT DMX512-A (ANSI E1.11)
- USITT DMX512 and ANSI E1.11 DMX512-A compliant
- Advanced Input Patch (AIP) allows any incoming address to be associated with any sACN address
- Flexible Output Patch (FOP) allows a 512-address universe to begin at any output address
- Support for per-address- or per-universe-level priority

MECHANICAL

- Menu button for backlight/paging control
- Backlit LCD display for identification and status reporting and basic configuration.
- Rack-Mount/Portable/Touring
 - Fabricated from 1.7mm/16-gauge cold-rolled steel
 - Black, Fine-textured, powder-coat finish
 - U-bolt mounting hardware available
 - Half width 19" equipment rack width allows for up to eight DMX ports in just 1U height
- DIN-rail
 - Extruded aluminium enclosure
 - Mounting complies with DIN43880
- Network, power and data activity LED indicators
 - Blue power indicator, green network activity indicator
 - Bi-color DMX activity indicator
- Front-panel RJ45 connector for connection to lighting network
- Reset button for hard reset or forced reboot

PROCESSOR

- Maximum delay time from input to output not greater than one packet time
- Selectable DMX refresh rate with a maximum at least 40Hz

ENVIRONMENTAL

- Ambient operating temperature: 0° to 40°C.
Operating humidity: 5% - 95% non-condensing
- Storage temperature: -40° to 70°C

ELECTRICAL

- Compliant with IEEE 802.3i for 10BASE-T, 802.3u for 100BASE-TX and 802.3af for Power over Ethernet
- Optional 8-28vDC power input for use with non-PoE systems
- Maximum 5W current draw
- CE compliant and ETL listed

MODULAR DMX PORTS (NON DIN-RAIL MODELS)

- Supports up to four DMX ports independently configurable as Inputs or Outputs
- Modular Gateway options include:
 - XLR 5-Pin Male DMX input connector
 - XLR 5-Pin Female DMX output connector
 - RJ45 DMX connector
 - Terminal strip connector
- Fully optically-isolated input from the Gateway electronics
- Withstands fault voltages of up to 250VAC
- Integrated DMX/RDM termination

SPECIFICATIONS

CONFIGURATION

- Configuration provided by Net3 Concert
 - Supports up to 512 DMX addresses per port
 - Supports up to 63,999 Streaming ACN universes
- Up to 2,048 channels in combination of data input or output
- DMX data input or output configurable by user
- Multiple outputs of a single DMX universe (DMX splitter) from a single Gateway
- Supports discrete DMX universe outputs per port
- Multiple sources may be combined to the network with each source or address allowed an independent priority
- Individual port start address and offset
- User-configurable labeling

ADDITIONAL INFORMATION

DMX512

Often shortened to DMX (Digital Multiplex), this communication protocol is used mainly to control dimmers and multi-parameter fixtures. A universe of DMX is defined as 512 channels. DMX sends a nearly continuous stream of level information for each control channel. It is a form of RS-485 digital serial communication.

RDM

Remote Device Management (ANSI E1.20) is a protocol enhancement to DMX512 that allows low-speed bidirectional communication between a system controller and attached RDM devices over a standard DMX line. This protocol will allow remote configuration, status monitoring, and management of devices.

sACN

Streaming ACN (ANSI E1.31), sends DMX-style control over TCP/IP networks. It provides a fast and efficient mechanism to transport the well-understood DMX protocol over Ethernet using an industry-standard protocol.


ACN

Architecture for Control Networks (ANSI E1.17) is a standard for high-speed bidirectional communication over TCP/IP on Ethernet network infrastructure. ACN is an open suite of protocols used between network devices for the purposes of greater and more adaptive control.

NET3

ETC's enhanced implementation of the standard ACN Protocol Suite (ANSI E1.17 and E1.31) including additional communication protocols for specialized applications and support of legacy systems.

TYPICAL SYSTEM RISER

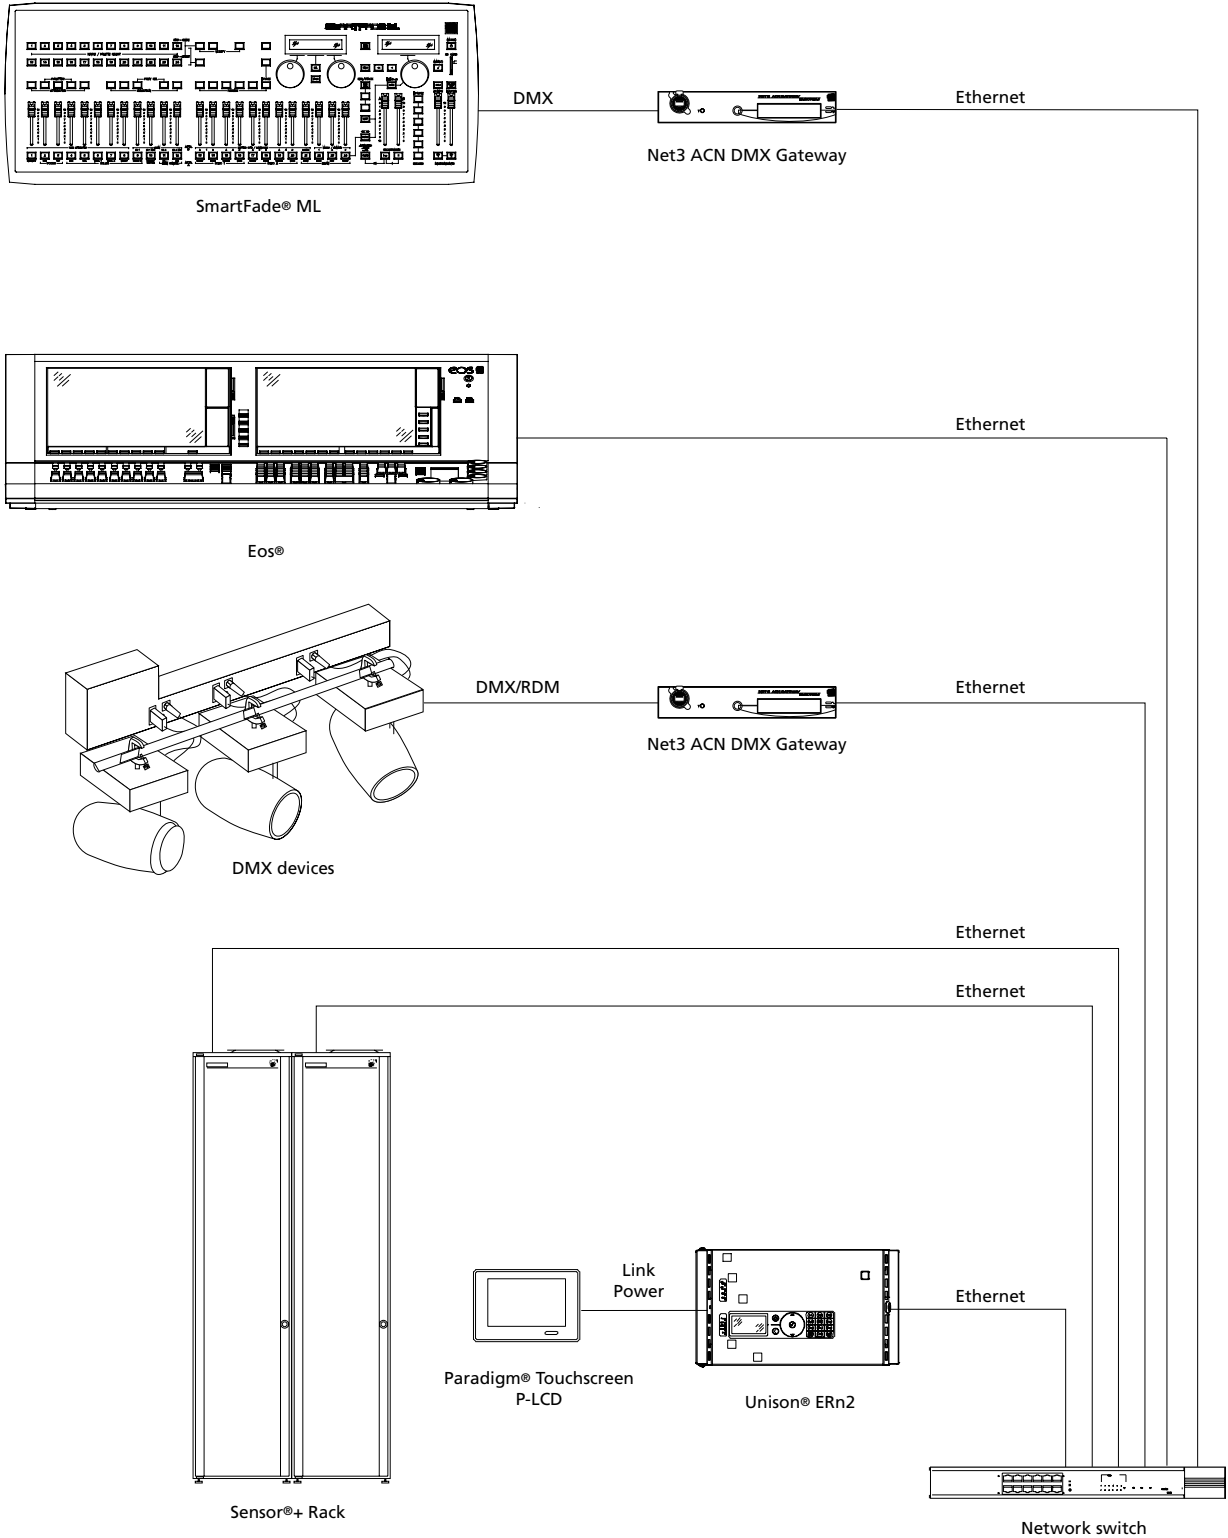

PHYSICAL

Net3 Four-Port Gateway Dimensions

MODEL	HEIGHT	WIDTH	DEPTH
	mm	mm	mm
Gateway - Modular	44	216	208

Net3 Four-Port Gateway Components

MODEL	WEIGHT	SHIPPING WEIGHT
	kgs	kgs
Gateway - Modular	1.4	3.2
Input Module XLR	0.1	0.5
Output Module XLR	0.1	0.5
Terminals Module	0.2	0.5
RJ45 Module	0.2	0.5

Net3 Four-Port Modular Gateway Accessories

MODEL	WEIGHT	SHIPPING WEIGHT
	kgs	kgs
Front Panel Kit 4 Out XLR ¹	0.5	0.9
Front Panel Kit 2 Out/2 In XLR ¹	0.5	0.9
Universal Power Supply	0.2	0.5
Gateway Rack Mount Kit	0.7	0.9
Hanging Bracket Kit w. U-Bolt	0.4	0.5

¹Does not include required Rack-Mount Kit

