

400W Vari-Soft LED




Type 9571 Variable-Color
 Type 9571-51REV Variable-Color (Pole Operated)

Specifications

- Head:** Type 9571, Type 9571-51REV
- Rating:** 90-250 Volts AC, 50-60Hz, 400 Watts, 4 Amps Max.
DMX Standby Draw <.1 Amps Max.
- Light Source:** (4) 100 Watt Mole-Richardson proprietary Color mixing LEDs
97CRI 2700°k - 95CRI 5600°k
- Fuse:** 5 Amp Slow-Blow. Fuseholder in Trough
- Dimming:** Flicker Free, Direct DC Dimming 100% - 0
- Aperture:** 8 in x 16 in (203mm x 406mm)
- Beam Angle:** 170° (Includes Field)
- Bounce Reflector:** 95% Reflective White Painted Aluminum
- Cooling:** Passive-Forced Air
- Construction:** Aluminum
- Yoke:** Aluminum Strap. Accepts 0.625 in (16 mm) dia. mounting hardware
- Compliance:** RoHS, CE, UL, CSA Pending
- IP Rating:** 30
- Finish:** Textured Epoxy Powder Coat.
- Size:** 9.3 in/237mm(d) x 21.4 in/543mm(w) x 20.3 in/514mm(h)
- Head Weight:** 18lbs/8.20kg (Head with 20ft/6m cable)
- Cable:** Detachable 20 ft. (6m) cable, powerCON to Edison with inline toggle switch (included in price of fixture)
- Local Control:** Two on-board potentiometers
Dimming (100% - 0)
Color Temperature (2700°K to 5600°K)
- DMX Control:** Ch. 1 - Color Temp: 0 = 2700°K - 5600°K
Ch. 2 - Intensity: 0 - 100 %



*integrated on-board power supply

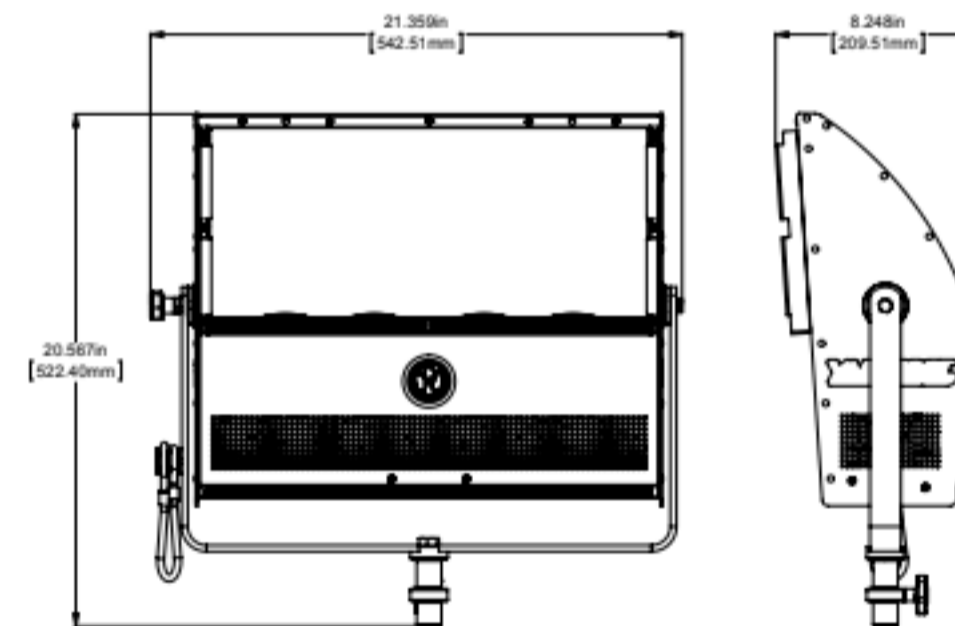

Accessories

	Item Number
Egg Crate	2595
Diffuser Frame (18 1/4" x 8 1/4")	25930
Full Single Scrim—Stainless Steel (18 1/4" x 8 1/4")	25979S
Full Double Scrim—Stainless Steel (18 1/4" x 8 1/4")	25979D
Pass-thru Cable powerCON to powerCON - 25 ft.	927352

Performance Data

Using (4) 100 Watt Mole-Richardson LED

Distance Feet (Meters)	Light Intensity 300W LED Foot Candles (Lux)				2591 - Tungsten 2000W Foot Candles (Lux) - Daylite
	2700K	3200K	4300K	5600K	
10	75	75	84	85	70
(3)	(807)	(807)	(904)	(915)	(753)

