



APPLICATIONS

- Restaurants and cafes
- Bars and clubs
- Reception and waiting rooms
- Offices and boardrooms
- Houses of worship
- Retail outlets
- Airports
- Delay and under-balcony coverage

FEATURES


- Dual 4.5-inch low distortion polypropylene low frequency drivers with butyl rubber surround
- 25 mm silk-dome tweeter with neodymium magnetic circuit
- ferrofluid liquid cooled tweeter voice coil, dampens resonances while reducing power compression
- 70° x 70° coverage
- 90Hz – 20kHz frequency response
- 109 dB SPL Max long term output
- High-density wood enclosure with durable textured finish
- Variable position yoke and U-bracket mounting hardware included
- Ideal as satellites with i-Class subwoofers

DESCRIPTION

i-Class systems are designed for AV contractors seeking a high-performance alternative to plastic box loudspeakers. By combining professional-grade components and rugged wood enclosures, i-Class models deliver sonic performance far beyond their competition.


The i-2x4.5 is a compact, two-way loudspeaker designed specifically for near-field applications where quality sound reproduction is a must. Offering slightly greater output and frequency response than the i-4.5, the i-2x4.5 combines the same 1-inch, silk-dome, ferrofluid tweeter with two 4.5-inch, professional grade woofers. All three drivers are mated to a high-quality crossover network and housed in a robust wood enclosure with a rugged industrial-grade coating. An angled design ensures easy installation in corners or on flat surfaces using the included mounting hardware. Connections are quick and easy thanks to recessed, phoenix input terminals. i-2x4.5s are also ideal as satellites with any of the i-Class subwoofers.

i-2x4.5 DIMENSIONAL DRAWING

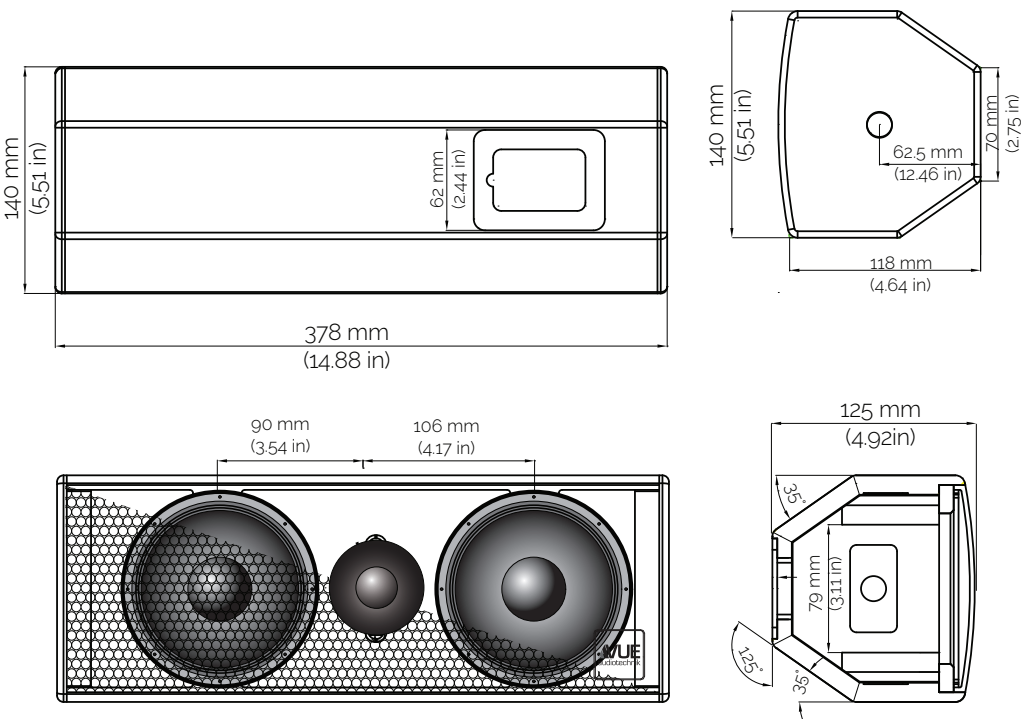

 VUE AUDIOTECHNIK LLC. WWW.VUEAUDIO.COM							
				A			
				SHEET 1 OF 1			
				JBERGER REV10			
X.0	XX.0	XXX.0	O.X	i-2x4.5 MECHANICAL SPECIFICATION			
±0.2	±0.5	±1.0	±0.05				
				Q/PRO_DRA17-I2X45			
				Yuanmingqiang 2017.02.18		Chenhong 2017.02.18	

HORIZONTAL DISPERSION MAP

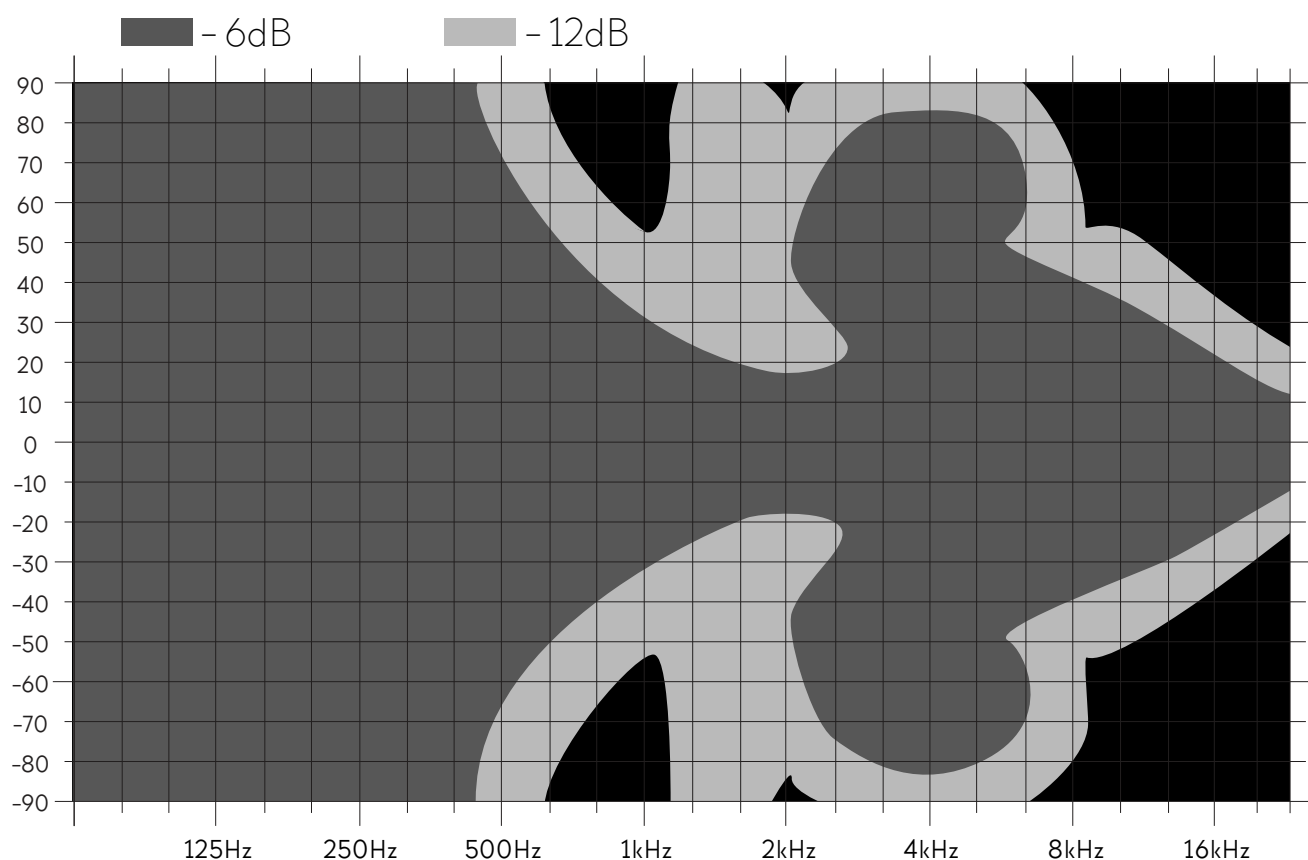

Horizontal Dispersion

VUE i-Class | i-2x4.5

SPECIFICATIONS

DUAL 4.5-INCH SURFACE-MOUNT FOREGROUND SYSTEM

DESCRIPTION	Dual 4.5 inch surface-mount 2-way system
ACOUSTIC DATA	
Frequency Response (+/- 3 dB)	90 Hz - 20 kHz
Frequency Range (-10 dB)	70 Hz - 20 KHz
Sensitivity (1 W/1 m)	88 dB
Power Handling Long Term	120 watts
Power Handling Program	240 watts
Max Peak SPL (band limited pink noise 6 dB crest factor)	115 dB SPL
Max SPL Long Term (AVG SPL @1 band limited pink noise 6 dB crest factor)	109 dB SPL
Coverage Horizontal	70 degrees - 6 dB
Coverage Vertical	70 degrees - 6 dB
TRANSDUCER DATA	
LF Driver Description	4" polypropylene, rubber surround, 1" (25 mm) voice coil, ferrite, 10 mm winding, 5 mm gap height, 16 Ohms
HF Driver Description	1" silk dome, 8 Ohms, neodym, ferrofluid, waveguide
Impedance	8 Ohms
Connectors	Pheonix type connector
PHYSICAL DATA	
Cabinet Material	High density wood composite
Cabinet Surface	Black polyurethane coating
Dimensions (H x W x D)	14.88 x 5.51 x 4.92 in (378 x 140 x 125 mm)
Weight	Net: 10.5 lbs / 4.76 kg